





Arbitrary Waveform Generator

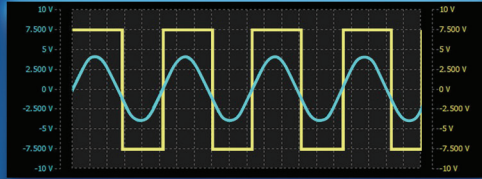


- 2 independent channels, 14Bit resolution | 25MHz, 200MS/s
- Variable clock for truly repetitive waveforms
- Max combined output voltage $\pm 10V$
- 6 standard wave shapes plus create and import your own

Universal I/O

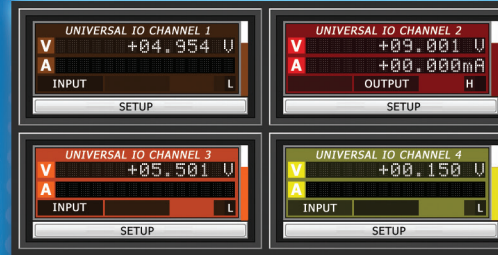


- 8 fully programmable, independent channels
- $\pm 10V$ OUT @20mA, $\pm 15V$ IN | 5 logic presets available

Oscilloscope

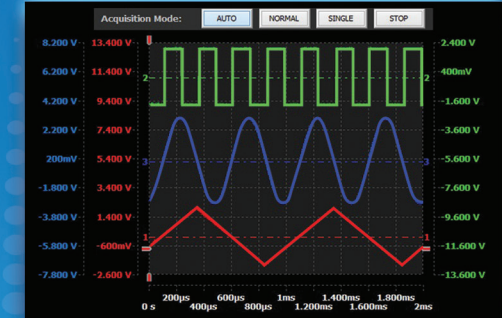


- 3 independent channels | 350MHz, 500MS/s per channel
- 6 trigger sources and 28 automatic measurements

Auxiliary Power Supply

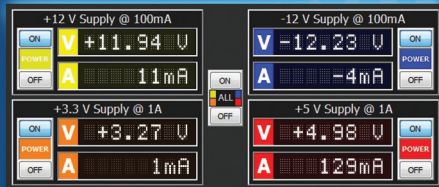

- 4 independently controlled channels
- $\pm 12V$ -12V up to 100mA
- $\pm 5V$ up to 1A, $\pm 3.3V$ up to 1A

Frequency Counter

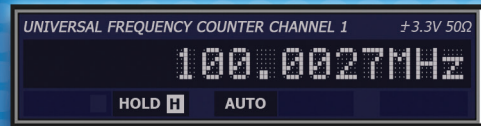

- 1 channel @1.1GHz
- + 3 channels @350MHz (DSO)
- Programmable trigger threshold
- Sensitivity -21dBm @100kHz / -1.2dBm @1.1GHz

Ammeter



- 1 channel, isolated
- DC, True RMS AC or AC+DC
- $\pm 10A$, 4 1/2 digits, 20,000 Count

Voltmeter



- 2 channels, isolated
- DC, True RMS AC or AC+DC
- $\pm 500V$, 4 1/2 digits, 20,000 Count

Ohmmeter



- 1 channel
- 20M Ω , 4 1/2 digits, 20,000 Count
- Resistance, Continuity and Diode modes

8 Instruments in 1 Module

SYSTEM 8
MIS 4



Introducing MIS 4

...more info >>>



Measurement



USB Interface



In circuit

MORE THAN JUST VIRTUAL INSTRUMENTATION



✓ Saves you time!

Save Test results

Share knowledge



Generate Reports

HTML CSV



TestFlow Manager - ...

Operation modes: Edit | Step | Run | **Pass**

1 - PCB - A55S/9999-2007
 2 - Power Supply test
 3 - Voltage Q7 & D3
 4 - Voltage Q8 & D5
 5 - Voltage Q10 & D7 D8
 6 - OP495GB Signal process PIN1
 7 - OP495GB Signal process PIN7
 8 - OP495GB Signal process PIN14
 9 - OP495GB Signal process PIN8
 10 - Track signal from edge connector FC

Test Instructions: Reset Next

ACTIONS:
 1- Check the power supply PIN 4 & 11 with Voltmeter CH1
 2- Check the signals on the output B pin 7
 3- Measure the impedance on the input pin R14-22

Step manager
 Add step Copy step Delete step
 Script editor Add media

Report manager
 New report Setup View Report

CUSTOM INSTRUMENT

Acquisition Mode: AUTO NORMAL SINGLE STOP

DVM CHANNEL 1 10MΩ TYPE AC AC+ DC Run
 +12.130 V
 RANGE 10mV 100mV 1V 10V 100V 500V Auto

EXTERNAL COUNTER CHANNEL 1 500 Frequency Mode
 8.019kHz
 Frequency Mode 10kHz 100kHz 1MHz 1kHz 10kHz 100kHz 1GHz
 POWER Run Single Hold Compare...

Inject tracking signal
 CH1 ON OFF Waiting
 Shape: Sine Load
 Frequency: < 1kHz >
 Duty Cycle: < 50 % > 50 %
 Amplitude: < 5 V > < 3 >
 Offset: < 0 V >
 Off Voltage: < 0 V >
 CH2 ON OFF Triggered
 Frequency: 1kHz
 Duty Cycle: 50 %
 Amplitude: 5V
 Offset: 0V

COMPARISON Ch1 N/A
 Target: 0 U
 Upper Tolerance: 0 U
 Lower Tolerance: 0 U
 MODE ON OFF Edit

Menu
 How to connect
 Instructions
 Schematics


+12V SUPPLY 100mA V 11.943 U A 0.2mA
 +3.3V SUPPLY 700mA V 3.269 U A 0.2mA
 POWER ON OFF POWER ON OFF

Add Media



Save Instrument settings

Design your Instruments

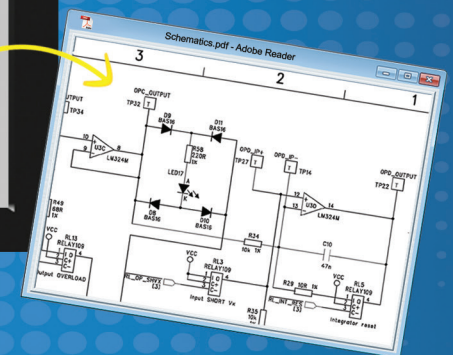

#EDUCATION #MAINTENANCE #AUTOMOTIVE & MANUFACTURING #OIL & GAS #TELECOMMUNICATIONS #TRANSPORT & ARMED FORCES



Introducing TestFlow



www.abielectronics.co.uk



+44 (0) 1226 207 420



Technical Datasheet

SYSTEM 8 MIS 4



✓ Saves you time!

abielectronics.co.uk



3 Channel Digital Storage Oscilloscope (DSO) Instrument

VERTICAL SPECIFICATIONS

Analogue Bandwidth (-3dB)	350 MHz
Bandwidth Limiting	20 MHz, 100 MHz, 200 MHz, switchable
Rise time (10% to 90%, calculated)	1 ns
Input ranges (full scale)	±40 mV to ±8 V, in 8 ranges
Input sensitivity	10 mV/div to 2 V/div
Input coupling	1 MΩ (AC or DC or GND)
Input characteristics	1 MΩ 15 pF
Analog offset range	±40 mV input range: ±40 mV ±80 mV input range: ±80 mV ±200 mV input range: ±200 mV ±400 mV input range: ±400 mV ±800 mV input range: ±800 mV ±2 V input range: ±2 V ±4 V input range: ±4 V ±8 V input range: ±8 V

HORIZONTAL (TIMEBASE) SPECIFICATIONS

Timebase ranges	50 ns/div to 1000 s/div (real-time sampling) 1 ns/div to 20 ns/div (ERS)
-----------------	---

ACQUISITION

Resolution	8 bits
Maximum real-time sampling rate	500 MS/s / Channel
Maximum ERS rate	25 GS/s
Buffer size	1,048,576 Samples / Channel

TRIGGERING

Sources	DSO Channels 1 to 3 AWG Channel 1 to 2 FC Channel 1
Modes	Auto, normal, single
Advanced types (real-time mode)	Edge (AC, DC, HF reject, LF reject)
Trigger level range	±40 mV input range: ±40 mV ±80 mV input range: ±80 mV ±200 mV input range: ±200 mV ±400 mV input range: ±400 mV ±800 mV input range: ±800 mV ±2 V input range: ±2 V ±4 V input range: ±4 V ±8 V input range: ±8 V
Trigger sensitivity	1 division up to full bandwidth of scope

AUTOMATIC MEASUREMENTS

Types	Amplitude, Peak-Peak, Top, Top Peak, Base, Base Peak, Mean, RMS, Cyclic Mean, Cyclic RMS, Overshoot, Undershoot, Crest Factor, V Resolution, Period, Frequency, Rise Time, Fall Time, Pos Time Constant, Neg Time Constant, Positive Width, Negative Width, Positive Slew, Negative Slew, Bandwidth, Duty Cycle, T Resolution, Cycle Count
Statistics	Minimum, maximum, average and sweeps
Mask Comparison	Selectable inside or outside mode with voltage and time tolerances

PROTECTION

Input Over Voltage	±200V MAX
--------------------	-----------

2 Channel Arbitrary Waveform Generator (AWG) Instrument

OUTPUT SPECIFICATIONS

Voltage Output Range	-10 V to +10 V
Amplitude/Offset Set Resolution	10 mV
Current Limit (Drive Strength)	±200 mA / Channel
Output Impedance	50 Ω (±1%)

STANDARD WAVEFORM FEATURES

Waveform Shapes	DC, Sine, Square, Triangle, Ramp+, Ramp-
Amplitude / Offset Adjustment	Maximum combined output voltage: ±10 V
Signal Frequency	0.5 Hz to 25 MHz
Duty Cycle Range	0% to 100%

ARBITRARY WAVEFORM FEATURES

Sample Rate Range	2 kS/s to 200 MS/s (continuously variable clock)
Buffer Size	4,096 Samples / Channel
Resolution	14 Bits

PROTECTION

Input Over Voltage	±15 V
Output Short Circuit	Continuous with automatic recovery

TRIGGERING

Sources	DSO Channels 1 to 3, AWG Channel 1 to 2 or FC Channel 1
Modes	Normal or Single
Trigger Output Level	-10 V to +10 V
Trigger Output Mode	Cycle or Edge

ADDITIONAL INFO

Channels have fully independent control and are asynchronous with respect to each other and to other instruments on the MIS 4. Independent variable clock control for true repetitive outputs at any frequency, with zero cycle to cycle jitter.

4 Channel Frequency Counter (FC and DSOFC) Instrument

INPUT SPECIFICATIONS

	Dedicated Channel	DSO Channel
Voltage Range	±3.3 V	±40 mV to ±8 V (see DSO)
Impedance	50 Ω (±1%)	1 MΩ 15 pF
Frequency Range	DC to 1.1 GHz	DC to 350 MHz
Sensitivity	-21dBm @ 100kHz -1.2dBm @ 1.1GHz	1 division (see DSO)

GATE TRIGGERING

Sources	DSO Channels 1 to 3, AWG Channel 1 to 2 or FC Channel 1
---------	---

AUTOMATIC MEASUREMENTS

Statistics	Minimum, maximum, average and sweeps
Comparison	Selectable inside or outside mode with target and tolerances

8 Channel Universal Input Output (UIO) Instrument

OUTPUT SPECIFICATIONS

Voltage Output Range	-10 V to +10 V
Voltage Set Resolution	10 mV
Current Limit (Drive Strength)	±20 mA / Channel

INPUT SPECIFICATIONS

Voltage Input Range	-12 V to +12 V
Voltage Resolution	1 mV

PROTECTION

Output Short Circuit	Continuous with automatic recovery
Input Over Voltage	±15 V (transient suppressor)

METER SPECIFICATIONS

Voltage Resolution	1 mV
Current Resolution	1 mA

ADDITIONAL INFO

Channels are non-isolated, constant voltage and can be accessed via the multiway connector. Each channel has an independent mode control. Pre-sets are provided for CMOS, LVCMOS, ECL, TTL and LVTTTL logic levels.

2 Channel Digital Voltmeter (DVM) Instrument

DIRECT VOLTAGE

Ranges	±1 V, ±10 V, ±100 V and ±500 V
Resolution	100 µV to 10 mV
Input Impedance	10 MΩ

ALTERNATING VOLTAGE @ 50-60Hz (TRUE RMS, AC or AC+DC)

Ranges	1 V, 10 V, 100 V and 500 V
Bandwidth	to
Resolution	100 µV to 10 mV
Input Impedance	10 MΩ

METER SPECIFICATIONS

Voltage Resolution	4½ Digits 20,000 Count
--------------------	------------------------

AUTOMATIC MEASUREMENTS

Statistics	Minimum, maximum, average and sweeps
Comparison	Selectable inside or outside mode with target and tolerances

ADDITIONAL INFO

The DVM shares its common terminal with the DOM but is isolated (500V MAX) from all other instruments.

1 Channel Digital Ammeter (DAM) Instrument

DIRECT CURRENT

Ranges	±100 mA, ±1 A and ±10 A
Resolution	10 µV to 1 mA
Sense Resistance	10 mΩ + cable resistance

ALTERNATING CURRENT @ 50-60Hz (TRUE RMS, AC or AC+DC)

Ranges	100 mA, 1 A and 10 A
Bandwidth	to
Resolution	10 µV to 1 mA
Sense Resistance	10 mΩ + cable resistance

METER SPECIFICATIONS

Resolution	4½ Digits 20,000 Count
Fuse	Fast Acting 12.5 A

AUTOMATIC MEASUREMENTS

Statistics	Minimum, maximum, average and sweeps
Comparison	Selectable inside or outside mode with target and tolerances

ADDITIONAL INFO

The DAM is isolated (500V MAX) from all other instruments.

1 Channel Digital Ohmmeter (DOM) Instrument

RESISTANCE

Ranges	10 Ω, 100 Ω, 1 kΩ, 10 kΩ, 100 kΩ, 1 MΩ and 10 MΩ
Resolution	1 mΩ to 1 kΩ

CONTINUITY

Ranges	0 Ω to 1 kΩ
Resolution	100 mΩ

DIODE

Ranges	0 V to 2 V
Resolution	100 µV
Test Current	1 mA

METER SPECIFICATIONS

Resolution	4½ Digits 20,000 Count
------------	------------------------

AUTOMATIC MEASUREMENTS

Statistics	Minimum, maximum, average and sweeps
Comparison	Selectable inside or outside mode with target and tolerances

ADDITIONAL INFO

The DOM shares its common terminal with the DVM but is isolated (500V MAX) from all other instruments

4 Channel Auxiliary Power Supply (APS) Instrument

OUTPUT SPECIFICATIONS

Voltage Output	+5 V ($\pm 2\%$)	+3.3 V ($\pm 2\%$)	+12 V ($\pm 2\%$)	-12 V ($\pm 2\%$)
Current Limit	1 A	1 A	100 mA	100 mA

PROTECTION

Output Short Circuit	Continuous with automatic recovery
-----------------------------	------------------------------------

METER SPECIFICATIONS

Voltage Resolution	10 mV
Current Resolution	1 mA

ADDITIONAL INFO

Outputs are fixed, non-isolated, constant voltage and can be accessed via the multiway connector. Each output has an independent On/Off control, however, additional control buttons are provided which turn all outputs on or off simultaneously.

Ordering Information

601011 SYSTEM 8 Multiple Instrument Station MIS 4 Including:

- 3 x DSO 1:1/10:1 Modular probes 300MHz
- 1 x Yellow probe and cable
- 1 x Blue probe and cable
- 1 x Red probe and cable
- 1 x Black probe and cable
- 1 x Universal I/O cable + PSU cable
- SYSTEM 8 Ultimate software on CD-ROM



Customers who already own a SYSTEM 8 solution with a free bay can add the MIS4 to their system by using this order code. Contact ABI for more information.

690257 SYSTEM 8 Multilink USB External Case (OPTIONAL) This external case houses one SYSTEM 8 MIS 4 module and can be used with any PC or a compatible laptop, connecting via USB. Supplied with USB cable and regional power cord.



601011- CASE SYSTEM 8 MIS 4 Carry Case (OPTIONAL) Complete with a customised foam interior. Streamlined design with integral handle and independent catches. Moulded in tough ABS material.



Errors and omissions excepted. Windows is a registered trade mark of Microsoft Corporation in the United States and other countries.
Copyright 2015 ABI Electronics Limited - Registered in England - No 1824588

More from ABI...

RevEng Schematic Learner



BoardMaster Universal PCB Tester



JTAGMaster Boundary Scan Tester & Programmer



SENTRY Counterfeit IC Detector



The Compact Range Out-of-circuit IC Testers



You're in good company!

For over 30 years, ABI has been the supplier of choice for a wide range of industries. Ranging from military and aerospace to education, mass transport and maintenance, ABI's customers are supported through a network of distributors present in 60 countries.



ABI Electronics Ltd
Dodworth Business Park
Barnsley S75 3SP
South Yorkshire
England, UK
Tel: +44 (0) 1226 207420
Fax: +44 (0) 1226 207420
www.abielelectronics.co.uk



sales@abielelectronics.co.uk



+44 (0) 1226 207 420



Your local ABI Distributor details